SENSOR SYSTEM CONFIGURATIONS


Four sensor system configurations can be produced:

- 1. One Part System the fiberoptic cable is not detachable from the amplifier.
- 2. Two Part System has a cable-mounted or amplifier bulkhead-mounted connector.
- 3. Three Part Vacuum Passthru System has a separate vacuum passthru flange.
- 4. Three Part Extension Cable System- has two in-line cable connectors.

Model Number Format:

D6-AB1C1ET1 The basic model number is followed by the letters in alphabetical order designating sensor options.

- 1. D100
- 2. D100-B (in-line) or D100-B1 (bulkhead)
- 3. D100-Bv2
- 4. D100-2B

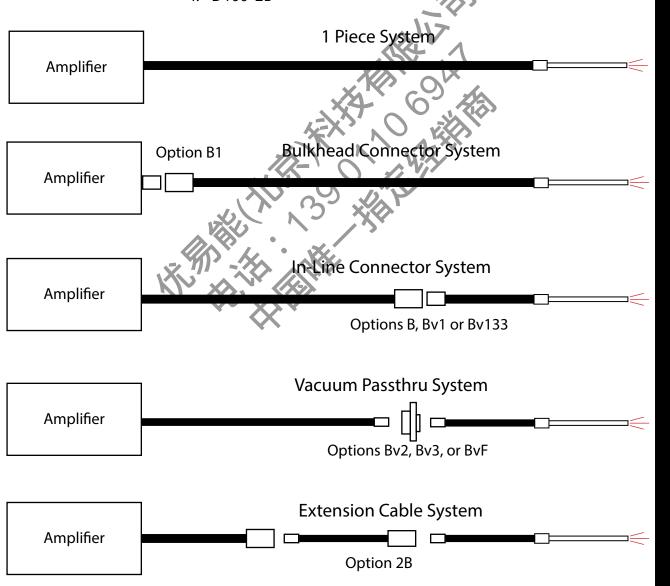

PHILTEC® FIBEROPTIC SENSORS