

FO CABLE JACKET OPTIONS

■ Option C8 - PVC - Polyvinyl Chloride



Small lightweight, very flexible, liquid tight, MRI compatible, not crush proof. Good for long lengths

Temperature Range +10 to 105°C


■ Option C9 - Annealed Stainless Steel Tubing



Semi-rigid, liquid tight, crush proof. Good for high temperature, high pressure, high vibration environments.

Temperature Range to 800°C

■ Option C10 - Silicone over Interlocking SS

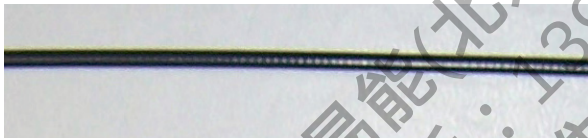

Flexible, liquid tight, crush proof.

Temperature Range -62 to +232°C

■ Option C11 - Polyolefin Shrink Tubing



Semi-Flexible, liquid tight, thin wall vapor barrier, not crush proof. MRI, BIO and vacuum compatible, radiation resistant.

Temperature Range -55 to +300°C

PHILTEC®

