

# FO CABLE JACKET OPTIONS

## ■ Option C12 - Polyolefin over SS Interlok



Crush proof, semi-flexible, liquid tight, thin wall vapor barrier, vacuum compatible.

Temperature Range -55 to +300°C


## ■ Option C13 - Furcation Tubing



PVC over Kevlar over PTFE. Standard in the telecom industry because of the Kevlar members which prevent stretching. Ideal for small fiber sensors, D20 or RC20 and smaller. MRI compatible and liquid tight. Light crush resistance.

Temperature Range +10 to 85°C


## ■ Option C14 - Braided SS over PTFE

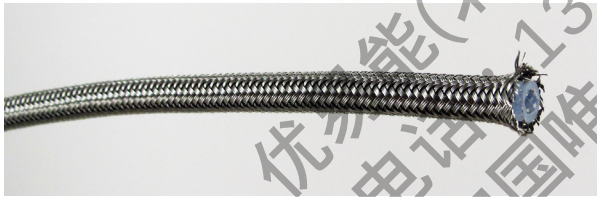

Semi-flexible, liquid tight, crush proof. Good for high pressure applications. Available O.D. sizes 0.312" (with 2" bend radius) and larger.

Temperature Range -53 to +204°C

## ■ Option C15 - Aluminum Flexible Conduit

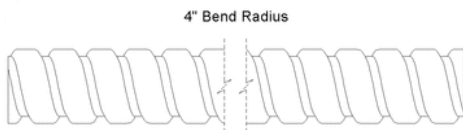

Semi-Flexible and crush proof. Available O.D. sizes 0.51" (with 4" bend radius) and larger.

Temperature Range -55 to +300°C

**PHILTEC®**

